



Rack and pinion passenger/goods hoist

Without counterweight - twin operation (2 cages)

PEGA 2737 TD VFC

TECHNICAL DATA

CAPACITY PER CAGE

Payload capacity	6000 lb
Passengers	28
Erection load	2200 lb
Speed	0-328 ft/min
Rated lifting height	0-1380 ft
Maximum tie spacing	34 ft

DIMENSIONS PER CAGE

Internal width x length	4'-11,1"x12'-1,7"
Internal minimum height	8'-2"
Door opening w x h	4'-8,3"x6'-6,7"
Mast section length	4'-11,4'

ELECTRICAL DATA PER CAGE

Power supply	460V 3Ph 60 Hz
Power supply fuses	80-160 A
Rated power	45-75 kW
Starting current	88-144 A
Running current (40% duty)	69-111 A
Power consumption	47-79 kVA

WEIGHTS PER CAGE

Base unit and enclosure	8820 lb
Cage weight	6400 lb
Mast section with 2 racks	386-474 lb

CONTROL SYSTEM

Joystick control
Preprogrammable floor stops

General:

All lifts equipped with frequency controlled drives
and programmable control systems


Variety of optional equipment

Different masts and tie- systems to meet all kind of application demands

Cage and landing doors either manual or automatic

Doors installations in different positions and combinations

The above specification may vary based on country and region of delivery.

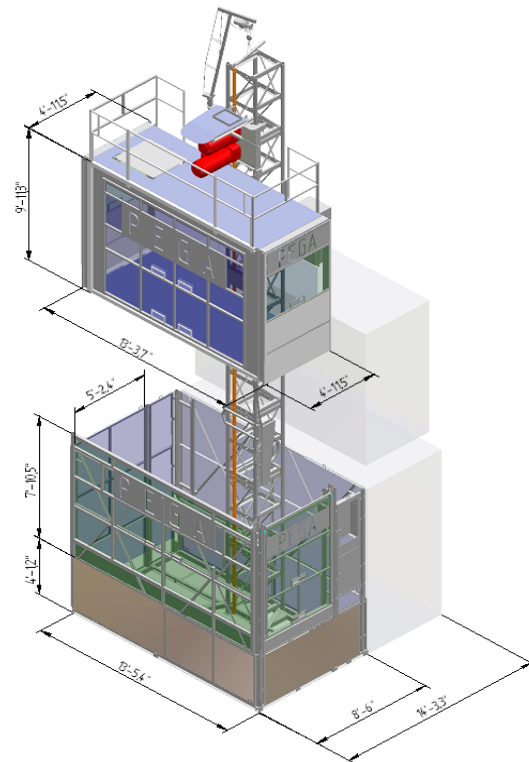

CONSULT - RENT - SALE - SERVICE

PEGA HOIST Ltd.



General Crane USA

1360 NW 33rd St
Pompano Beach, FL 33064
Tel. : +1 954 973 3030
Fax : +1 954 973 3211
E-mail : sale@generalcraneusa.com
www.generalcraneusa.com

The technical data above are for information only. The manufacturer reserves the right to change the parameters subject to continuous development and improvements.