


RADIUS KEY
BLACK CIRCLE = ACTUAL MAXIMUM PICK RADIUS
BLUE CIRCLE = PHYSICAL JIB TIP CLEARANCE
MAGENTA CIRCLE = EXPECTED MAXIMUM DEFLECTION RADIUS

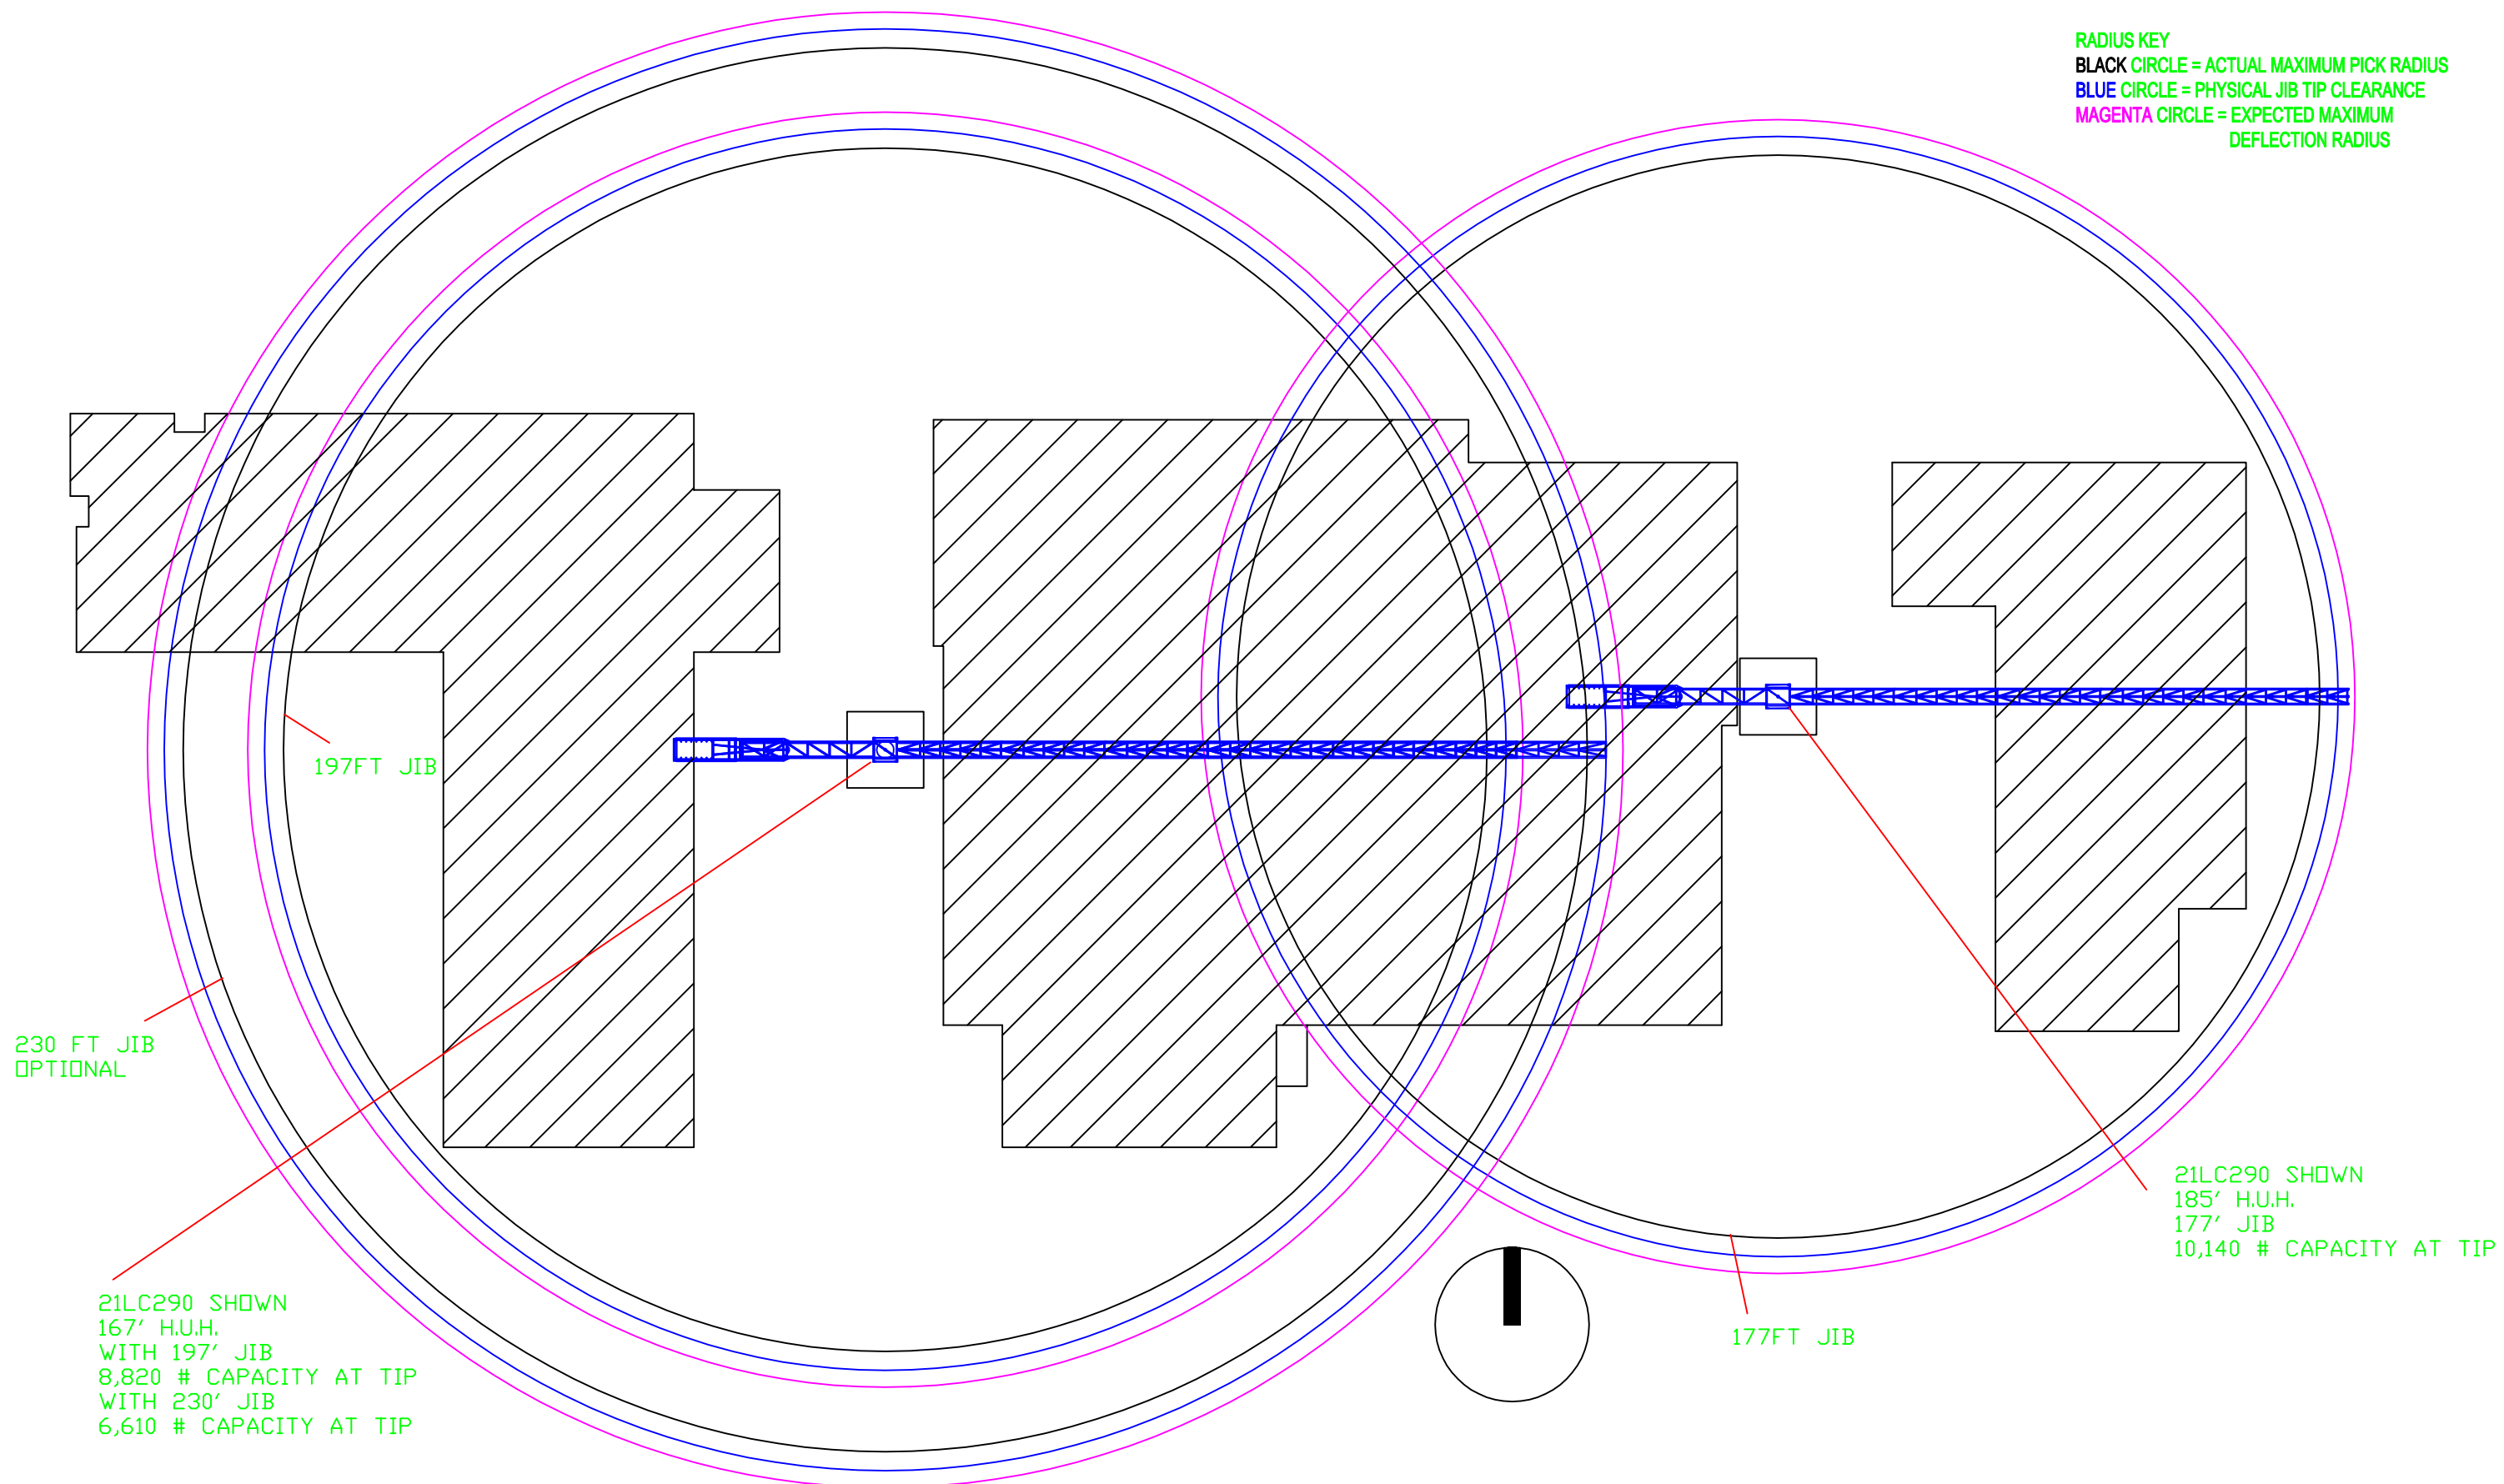

NOTES:
 This drawing has been prepared for the sole use of GENERAL CRANE USA. It is loaned to the recipient for his confidential use only. Reproduction or distribution shall not be performed without the express written consent of GENERAL CRANE USA.
SOIL BEARING CAPACITIES - The ability of the soil to support the required loads of the equipment is critical. The worst case loading for the crane including a margin for unknowns must be analyzed. It is the responsibility of the customer for this analysis and verification of existing site soil conditions. The customer's qualified soils expert should review the soil conditions in the area under the equipment to ensure that there is adequate capacity.
UNDERGROUND STRUCTURES - Customer is to verify that there are no underground structures or obstructions in the area of the equipment locations planned in these drawings. It is the customer's responsible to ensure that all underground structures and utilities are marked and necessary stabilization provided.

| REV | DATE | BY | DESCRIPTION |
|-----|------|----|-------------|
| | | | |
| | | | |
| | | | |

SEAL



DRAWN BY:
ADAM COTE
DATE:
2/22/07
CHECKED BY:
DATE:

TOWER LOCATIONS
 HANOVER GRP
 PASEO DEL MAR

PROJECT NO.
1238
 NTS
 Sheet: 1 of 1
 1238-01